

10-19-00

UTILITY PATENT APPLICATION TRANSMITTAL

(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
22784-65403Total Pages in this Submission
71**TO THE ASSISTANT COMMISSIONER FOR PATENTS**Box Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

PARCEL BOX

and invented by:

Joseph A. Rasche

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: _____

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 17 pages and including the following:
 - a. ☒ Descriptive Title of the Invention
 - b. ☐ Cross References to Related Applications (*if applicable*)
 - c. ☐ Statement Regarding Federally-sponsored Research/Development (*if applicable*)
 - d. ☐ Reference to Microfiche Appendix (*if applicable*)
 - e. ☒ Background of the Invention
 - f. ☒ Brief Summary of the Invention
 - g. ☒ Brief Description of the Drawings (*if drawings filed*)
 - h. ☒ Detailed Description
 - i. ☒ Claim(s) as Classified Below
 - j. ☒ Abstract of the Disclosure

UTILITY PATENT APPLICATION TRANSMITTAL (Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
22784-65403

Total Pages in this Submission
71

Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☐ Formal b. ☐ Informal Number of Sheets 44
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application,
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche
7. ☐ Genetic Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

Accompanying Application Parts

8. ☐ Assignment Papers (cover sheet & documents)
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☐ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class ☒ Express Mail (Specify Label No.): EL 504 432 645 US

10-19-00 A

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
22784-65403

Total Pages in this Submission
71

Fee Calculation and Transmittal

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	16	- 20 =	0	x \$9.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$40.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$355.00
OTHER FEE (specify purpose)					\$0.00
TOTAL FILING FEE					\$355.00

- ☒ A check in the amount of **\$355.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. _____ as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: **October 18, 2000**


Signature

cc:

UTILITY PATENT APPLICATION TRANSMITTAL
(Small Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.
22784-65403

Total Pages in this Submission
71

Accompanying Application Parts (Continued)

15. ☐ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*
16. ☒ Small Entity Statement(s) - Specify Number of Statements Submitted: 1
17. ☐ Additional Enclosures *(please identify below)*:

Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)

18. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

Warning

An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.

CERTIFICATE OF MAILING BY "EXPRESS MAIL" (37 CFR 1.10)Applicant(s): **Joseph A. Rasche**

Docket No.

22784-65403

Serial No.

Unknown

Filing Date

Herewith (10/18/2000)

Examiner

Unknown

Group Art Unit

Unknown

Invention: **PARCEL BOX**I hereby certify that this **Utility Patent Application**

(Identify type of correspondence)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under
37 CFR 1.10 in an envelope addressed to: The Commissioner of Patents and Trademarks, Washington, D.C.

20231-0001 on **October 18, 2000**

(Date)

Kim Tyree

(Typed or Printed Name of Person Mailing Correspondence)

(Signature of Person Mailing Correspondence)

EL 504 432 645 US

("Express Mail" Mailing Label Number)

Note: Each paper must have its own certificate of mailing.U.S. PTO
09/691328
10/18/00

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY
STATUS (37 CFR 1.9(f) AND 1.27 (b)) - INDEPENDENT INVENTOR**

Docket No.
22784-65403

Serial No.
Unknown

Filing Date
Herewith (10/18/2000)

Patent No.
Unknown

Issue Date
Unknown

Applicant/ **Joseph A. Rasche**
Patentee:

Invention: **PARCEL BOX**

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention entitled above and described in:

- ☒ the specification to be filed herewith.
☐ the application identified above.
☐ the patent identified above.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

- ☒ No such person, concern or organization exists.
☐ Each such person, concern or organization is listed below.

***NOTE:** Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27)

FULL NAME
ADDRESS

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME
ADDRESS

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME
ADDRESS

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

FULL NAME
ADDRESS

☐ Individual ☐ Small Business Concern ☐ Nonprofit Organization

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF INVENTOR Joseph A. Rasche

SIGNATURE OF INVENTOR Joseph A. Rasche

DATE: 10-17-2020

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

NAME OF INVENTOR _____

SIGNATURE OF INVENTOR _____

DATE: _____

-1-

PARCEL BOX

Field of the Invention

5 This invention relates to parcel handling. It is disclosed in the context of a secure box for the delivery of parcels to, for example, residential customers of parcel delivery services, but is believed to have applications in other fields as well.

Background of the Invention

10 Due in part to the increasing popularity of Internet commerce, the need has developed for a system that would permit parcel addressees to receive parcels in a relatively more secure manner. There are the methods and apparatus described in the following U. S. Patents: 4,724,999; 4,905,891; 4,993,626; 5,056,711; 5,071,063; 5,096,115; 5,143,284; 5,351,883; 5,390,849; 5,400,960; 5,526,979; 5,564,624; 5,664,729; 5,820,018; 5,833,132; 5,850,967; 5,938,113; and, 5,992,736.

15 The disclosures of these prior art references are hereby incorporated by reference. This listing is not intended as a representation that a thorough search of the prior art has been conducted, or that no more pertinent art than that listed above exists, or that the cited art is, or is considered to be, material to patentability of the disclosed invention. Nor should any such representation be inferred.

20

Summary of the Invention

An enclosure includes a pair of panel mounts for orienting adjacent a surface, a pair of side panels movably coupled to the panel mounts and movable between storage orientations generally between the panel mounts and use orientations

25 in which they project away from the surface generally perpendicular thereto, a top panel having a storage orientation generally between the panel mounts and a use orientation in which it is projected from between the panel mounts and pivoted downwardly and forwardly to overlies and engage the side panels and a front panel for engagement with the side panels and the top panel when the top panel is in its use

30 orientation to form an enclosure.

Illustratively according to this aspect of the invention, the side panels are pivotally coupled to the panel mounts by hinges.

Further illustratively according to this aspect of the invention, the enclosure includes links for coupling the side panels and the front panel together and to the panel mounts. Each side panel is pivotally coupled to a panel mount and projects forwardly therefrom in a use orientation and is pivotally coupled to a
5 respective link. Each link is pivotally coupled to the front panel.

Additionally illustratively according to this aspect of the invention, the top panel has a use orientation in which it is projected upward from between the panel mounts and pivoted downwardly and forwardly to overlie and engage the side panels.

Illustratively according to this aspect of the invention, the front and top
10 panels include a front panel, a first top component, and a second top component.

Further illustratively according to this aspect of the invention, the enclosure includes a mechanism by which the parcel receiving box can be locked when the panels are so oriented as to form an enclosure.

Further illustratively according to this aspect of the invention, the
15 enclosure includes a bottom panel having a storage orientation in which it lies generally between the panel mounts and a use orientation in which it is pivoted forwardly and downwardly with respect to the panel mounts to lie at the bottom of the enclosure.

Further illustratively according to this aspect of the invention, the
20 enclosure includes a device for limiting the forward and downward pivoting of the bottom panel with respect to the panel mount.

According to another aspect of the invention, a method for providing an enclosure includes providing a pair of panel mounts for orienting adjacent a surface, movably coupling a pair of side panels to the panel mounts for movement
25 between storage orientations generally between the panel mounts and use orientations in which they project away from the surface generally perpendicular thereto, mounting a top panel for movement between a storage orientation generally between the panel mounts and a use orientation overlying and engaging the side panels, and providing a front panel for engaging the side panels and the top panel when the top
30 panel is in its use orientation to form an enclosure.

Illustratively according to this aspect of the invention, pivotally coupling the side panels to the panel mounts includes hingedly coupling the side panels to the panel mounts.

Further illustratively according to this aspect of the invention, the method includes coupling the side panels and the front panel together through links. Each side panel is pivotally coupled to a panel mount and projects forwardly therefrom in a use orientation and is pivotally coupled to a respective link. Each link is pivotally coupled to the front panel.

Additionally illustratively according to this aspect of the invention, the method includes projecting the top panel upward from between the panel mounts and pivoting the top panel downwardly and forwardly to overlie and engage the side panels.

Illustratively according to this aspect of the invention, providing front and top panels includes providing a front panel, a first top component, and a second top component.

Further illustratively according to this aspect of the invention, the method includes providing a mechanism by which the parcel receiving box can be locked when the panels are so oriented as to form an enclosure.

Further illustratively according to this aspect of the invention, the method includes providing a bottom panel having a storage orientation in which it lies generally between the panel mounts and a use orientation in which it is pivoted forwardly and downwardly with respect to the panel mounts to lie at the bottom of the enclosure.

Further illustratively according to this aspect of the invention, the method includes limiting the forward and downward pivoting of the bottom panel with respect to the panel mount.

Brief Descriptions of the Drawings

The invention may best be understood by referring to the following detailed descriptions of illustrative embodiments and accompanying drawings. In the drawings:

Fig. 1 illustrates a perspective view, taken from the front, right hand side and above, of an embodiment of the invention in the stored, or undeployed, orientation;

Fig. 2 illustrates a perspective view of the embodiment illustrated in
5 Fig. 1, taken from the rear, right hand side and above;

Fig. 3 illustrates a perspective view of the embodiment illustrated in Figs. 1-2, taken from the front, right hand side and above, in an early stage of deployment;

Fig. 4 illustrates a perspective view of the embodiment illustrated in
10 Figs. 1-3, taken from the rear, right hand side and above, in the same stage of deployment as Fig. 3;

Fig. 5 illustrates a perspective view of the embodiment illustrated in Figs. 1-4, taken from the front, right hand side and above, in a subsequent stage of deployment;

15 Fig. 6 illustrates a perspective view of the embodiment illustrated in Figs. 1-5, taken from the front, right hand side and above, in yet a subsequent stage of deployment;

Fig. 7 illustrates a perspective view of the embodiment illustrated in Figs. 1-6, taken from the front, right hand side and above, in yet a further stage of
20 deployment;

Fig. 8 illustrates a perspective view of the embodiment illustrated in Figs. 1-7, taken from the front, right hand side and above, in a still further stage of deployment;

Fig. 9 illustrates a perspective view of the embodiment illustrated in
25 Figs. 1-8, taken from the front, right hand side and above, in yet a further stage of deployment;

Figs. 10-11 illustrate perspective views of the embodiment illustrated in Figs. 1-9, taken from the front, right hand side and above, fully deployed;

Fig. 12 illustrates a side elevational view of a component of the system
30 illustrated in Figs. 1-11;

Fig. 13 illustrates a perspective view from the front, right side and above, of the component illustrated in Fig. 12;

Fig. 14 illustrates a perspective view of another component of the system illustrated in Figs. 1-11;

Fig. 15 illustrates a perspective view of another component of the system illustrated in Figs. 1-11;

5 Fig. 16 illustrates a perspective view of another component of the system illustrated in Figs. 1-11;

Fig. 17 illustrates a perspective view of another component of the system illustrated in Figs. 1-11;

10 Fig. 18 illustrates a perspective view of another component of the system illustrated in Figs. 1-11;

Fig. 19 illustrates a perspective view of the component illustrated in Fig. 18, taken from the other side;

Fig. 20 illustrates a perspective view of another component of the system illustrated in Figs. 1-11;

15 Fig. 21 illustrates a perspective view of another component of the system illustrated in Figs. 1-11;

Fig. 22 illustrates another perspective view of the component illustrated in Fig. 21, taken from a different angle;

20 Fig. 23 illustrates a perspective view of another component of the system illustrated in Figs. 1-11;

Fig. 24 illustrates another perspective view of the component illustrated in Fig. 23, taken from a different angle;

25 Fig. 25 illustrates a perspective view, taken from the front, above and the left hand side, of another embodiment of the invention in an undeployed orientation;

Fig. 26 illustrates a perspective view, taken from the front, above and the left hand side, of the embodiment of Fig. 25 in a partially deployed orientation;

Fig. 27 illustrates a perspective view, taken from the front, above and the left hand side, of the embodiment of Figs. 25-26 in a fully deployed orientation;

30 Fig. 28 illustrates an exploded perspective view, taken from the front, above and the left hand side, of certain components of the embodiment illustrated in Figs. 25-27;

Fig. 29 illustrates a perspective view, taken from the front, above and the right hand side, of another embodiment of the invention in an undeployed orientation;

Fig. 30 illustrates a perspective view of the embodiment illustrated in
5 Fig. 29, taken from the right rear;

Fig. 31 illustrates a top plan view of the embodiment illustrated in Figs. 29-30, with certain components removed for purposes of explanation;

Fig. 32 illustrates a top plan view of the embodiment illustrated in Figs. 29-31 in an early stage of deployment;

10 Fig. 33 illustrates a perspective view of the embodiment illustrated in Figs. 29-32, taken from the front, right hand side and above, in a subsequent stage of deployment;

Fig. 34 illustrates an enlarged perspective view from the front, left and above, of the embodiment illustrated in Figs. 29-33;

15 Fig. 35 illustrates an enlarged perspective view, from the front right side and above, of the embodiment illustrated in Figs. 29-34;

Fig. 36 illustrates a perspective view of the embodiment illustrated in Figs. 29-35, taken from the front, right hand side and above, in a subsequent stage of deployment;

20 Fig. 37 illustrates a perspective view of the embodiment illustrated in Figs. 29-36, taken from the front, left hand side and above, fully deployed;

Fig. 38 illustrates a perspective view of a component of the system illustrated in Figs. 29-37;

25 Fig. 39 illustrates a perspective view from the front, right and above, of another component of the system illustrated in Figs. 29-37;

Fig. 40 illustrates a perspective view from the rear, right and above, of the component illustrated in Fig. 39;

Fig. 41 illustrates a perspective view from the front, left and above, of the component illustrated in Figs. 39-40;

30 Fig. 42 illustrates a perspective view of another component of the system illustrated in Figs. 29-37;

Fig. 43 illustrates a perspective view of another component of the system illustrated in Figs. 29-37;

Fig. 44 illustrates a perspective view of another component of the system illustrated in Figs. 29-37;

5 Fig. 45 illustrates a perspective view of another component of the system illustrated in Figs. 29-37;

Fig. 46 illustrates a perspective view of another component of the system illustrated in Figs. 29-37; and,

10 Fig. 47 illustrates a perspective view of another component of the system illustrated in Figs. 29-37.

Detailed Descriptions of Illustrative Embodiments

The fold-out parcel receiving box 40, hanging fold-out parcel receiving box 140 and the swing-out parcel receiving box 240 illustrated and described herein
15 have been developed to meet this need. The parcel receiving boxes 40, 140, 240 illustrated and described herein fold away when not in use. Illustrative dimensions for the parcel receiving boxes 40, 140, 240 illustrated and described herein are 40 inches by 40 inches by 40 inches. However, it should be clear that the sizes of the various disclosed embodiments can be scaled to meet the needs of a particular application.
20 Similarly, the illustrated embodiments contemplate blow molded resin construction, but any other suitable construction technique, such as stamped or otherwise formed metal construction, may be used to realize a fold-out parcel receiving box according to the invention.

Fig. 1 illustrates a front view of a first embodiment of a fold-out parcel
25 receiving box 40 in its undeployed orientation. The parcel box 40 includes a mounting plate 42 which rests on a suitable surface 44, such as, for example, the floor of a porch of a residence, a concrete pad, or the ground. A pair of side wall mounts 46 are attached, such as by threaded fasteners or other suitable means, to, for example, a vertical outside wall of the residence or other structure. A mechanism 47 by which
30 the parcel receiving box 40 is locked is not illustrated in detail, but may be any of a number of known types. Hinges 48, 50, respectively, are provided between a front door 52 and a small top lid 54, and between the small top lid 54 and a large top lid 56,

Fig. 2. Suitable hinge pins of any sufficiently durable material, such as steel, pass through mating passageways in the hinge 48, 50 knuckles to complete the hinge joints. A hinge 62 between a “drawbridge” door 63 and the mounting plate 42 is also illustrated. A handle slot 64 by which the small top lid 54 is manipulated during the opening process of the fold out parcel receiving box 40 is also illustrated.

Fig. 2 illustrates a back view of the fold-out parcel receiving box 40 illustrated in Fig. 1. A single bracing bar 66 is illustrated. (An) additional bracing bar(s) 66 can be added as believed necessary or advisable to increase sturdiness of the box 40, the clamping force to the structure to which the box 40 is mounted, and so on. The side wall mounts 46 again are attached to the structure, by any suitable means such as threaded fasteners, not shown. A secondary parcel gate 68 is also illustrated in the large top lid 56.

Fig. 3 illustrates a first step in opening the fold-out parcel receiving box 40. The edge of the front door 52 is grasped, lifted slightly, and then rotated away from the closed position exposing the internal components. Hinges 70 between the side wall mounts 46 and a pair of identical side walls 72 are clearly visible in this view. Fig. 4 illustrates a rear view of the parcel receiving box 40 during this first step in the opening process.

Fig. 5 illustrates the drawbridge 63 in the open position. The user deploys the drawbridge 63 after lifting the front door 52 out of the way. The drawbridge side walls 76 are illustrated in this view. The drawbridge side walls 76 restrain the left and right side walls 72 from over rotating during set up. The drawbridge side walls 76 also reduce the likelihood of possible pivot access by unauthorized personnel. The drawbridge door front wall 78, which also reduces the likelihood of possible pivot access by unauthorized personnel, is also illustrated.

Fig. 6 illustrates the left side wall 72 rotated out to its open position. The right side wall 72 is illustrated in its closed position. A guide slot 82 is illustrated in the side wall mount 46.

Fig. 7 illustrates the left and right side walls 72 in their open positions. In the illustrated embodiments, the left and right side walls 72 are symmetric, which provides the added benefit that one part can be used for both sides, which reduces tooling costs. The side walls 72 are illustrated as having vents 86 in a particular

pattern. However, it should be understood that vents 86 of any type, or no vents at all, are within the contemplation of this invention.

Fig. 8 illustrates the front door 52 and small top lid 54 oriented above the fully deployed side walls 72. This orientation permits placement of parcels into the parcel box 40 before it is closed.

Fig. 9 illustrates the large top lid 56 being slid upward along the guide slots 82 and rotated toward closure. The front door 52 and small top lid 54 pivot about their hinge axes 48, 50. Pivot pins 90 provided on the large top lid 56 engage guide slots 82, securing the large top lid 56 to the side wall mount 46. Grooves 92 provided in the front door 52, small top lid 54 and the large top lid 56, engage the edges of the side walls 72. The side walls 72 are retained by the hinges 70 between themselves and the side wall mounts 46 and by the side walls 72 fitting into the grooves 92.

Figs. 10 and 11 illustrate the fold out parcel receiving box 40 fully deployed, in the orientation in which it would appear with deposited delivered parcels secured in it. Since parcel delivery services deliver parcels at different times of day, the fold-out parcel delivery box 40 should be made to accommodate deliveries made after parcels are placed in the box 40 and the box 40 closed and locked. In the illustrated embodiment, parcels can be delivered after the box 40 has been closed by using the secondary parcel gate 68. The secondary parcel gate 68 is large enough to accept packages in standard sizes delivered by several of the delivery services. The secondary parcel gate 68 includes inwardly pointing fingers 96 which permit such packages to be inserted into the fold-out parcel receiving box 40. These same fingers 96 reduce the likelihood that anyone will be able to remove parcels through the secondary parcel gate 68. Slot 64 accepts letter size mail. Storage of the parcel receiving box 40 after removal of parcels from it.

Fig. 12 illustrates a side view of the secondary parcel gate 68, illustrating the downward locking finger 96 configuration.

Fig. 13 illustrates a isometric view of the secondary parcel gate 68.

Fig. 14 illustrates the drawbridge door 63.

Fig. 15 illustrates the mount plate 42.

Fig. 16 illustrates the brace bar

Fig. 17 illustrates the front door 52, illustrating the grooves 92 used to restrain the left and right side, side walls 72.

Fig. 18 illustrates the left / right side wall 72. As previously noted, the configuration of the side wall 72 is symmetric, so that the side wall 72 can be used for
5 either the left side or the right side. A typical vent pattern is illustrated.

Fig. 19 illustrates the outside view of the left/right side wall 72.

Fig. 20 illustrates the side wall mount 46. The bolt hole locations, the guide slot 82 and the hinged joint 70 between the side walls 72 and the side wall mount 46 are illustrated. As with the side wall 72, the configuration of the side wall
10 mount 46 is symmetric, permitting the mount 46 to be used on either side of the structure.

Fig. 21 illustrates the large top lid 56. The pivot pins 90 engage in the guide slots 82 and have enlarged diameter ends 98 which engage enlarged sections of the guide slots 82 to permit movement of the pins 90 up and down in the guide slots
15 82 to permit deployment and storage of the box 40 but restricts the pivot pins 90 from being pulled out of their respective guide slots 82. The opening 100 into which the secondary parcel gate 68 is inserted is also illustrated..

Fig. 22 illustrates the grooves 92 in the large top lid 56. The grooves 92 restrain the movement of the side walls 72.

Fig. 23 illustrates the small top lid 54. The handle slot 64, hinge between the front door 52 and the small top lid 54 and the hinge between the small top lid 54 and the large top lid 56 are also illustrated in Fig. 22..
20

Fig. 24 illustrates an inside view of the small top lid 54. The grooves 92 that restrain the side walls 72 at the time of closure can be seen in this view.

Another embodiment 140 of the parcel box is illustrated in Figs. 25-28. This embodiment of the parcel box 140 is adapted to be suspended from a wall 144 of a residence or the like. Like the embodiment described above, it is also foldable when not in use. Fig. 28 illustrates a wall mounting plate 142 fabricated from, for example, sheet steel. The wall mounting plate 142 is used to convert the vertical load into a
25 shear load. The drawbridge door 163, Fig. 26, mounts to a hinge 162 at the base of the plate 142. A cable 165 is attached at 167 to the wall mounting plate 142 and to a
30

Fig. 20 illustrates the hanging fold out parcel receiving box 140 in a partially deployed orientation. The cable 165 is drawn tight by the weight of the drawbridge 163 and side walls 172. The hanging fold out parcel receiving box 140 is deployed to receive parcels and stored after the parcels have been removed in a similar sequence to the fold out parcel receiving box 40 illustrated in Figs. 1-24.

Figs. 29-47 illustrate another embodiment of the invention. Referring particularly to Fig. 29, a swing out parcel receiving box 240 is illustrated in the undeployed position. A double hinged cover plate 242 covers the internal components of parcel box 240. A wall mount 244 mounts to a surface 246 of the house or other structure with the bottom of the wall mount 244 resting on a surface 248, such as the floor of a porch or the ground. A left side door 272 L faces outward in the closed position.

Fig. 30 illustrates a rear perspective view of the parcel receiving box 240 in the undeployed orientation. Eight bolt holes are illustrated, as well as the top lid 256 in a stored position. Of course, other bolt patterns, and other attachment mechanisms can be employed to secure box 240 to the structure 246.

Fig. 31 illustrates a top view of the swing out parcel receiving box 240 with the double hinged cover plate 242 removed for purposes of clarity. The left side 272 L, front 252 and right side 272 R panels are shown in their undeployed orientations. Embedded magnetic strips 273 extend at least a portion of the height of the front 252 and right side 272 R panels to maintain the box 240 in undeployed orientation. The magnetic strips 273 may be similar to the magnetic strips that extend around the perimeter of refrigerator door and/or door opening, except that they

only extend for some portion of the height of the two panels 252, 272 R. The top lid 256 is illustrated in its undeployed orientation.

Fig. 32 illustrates a first step in the process for deploying the parcel box 240 to its fully deployed orientation in preparation for receiving (a) parcel(s).

5 The left side panel 272 L is pulled away from the magnetic strip 273 and rotated away from the wall 246. As the left side panel 272 L extends past square in its rotation, the front 252 and right side 272 R panels are moved outward, away from the wall 246.

Fig. 33 illustrates a further step in the opening process of the swing out parcel receiving box 240. The double hinged cover plate 242 is rotated up toward the wall 246 and is left there, out of the way, while the side panels 272 L, 272 R and front panel 252 are swung out to form the box 240.

Fig. 34 illustrates a somewhat enlarged perspective view from the top, front left, of the undeployed swing out parcel receiving box 240. As with the previously described embodiments, the hinges 270 include pins, which may be metal or plastic rods that run the length of the doors. All pins except a removable pin 275
15 can be fixed in place at the time of manufacture. The removable pin 275 may have a handle formed at one end. The pin 275 is removed when the user wishes to remove (a) delivered parcel(s). An example of a pin handle configuration is illustrated.

Fig. 35 illustrates an enlarged perspective view, from the front right side and above, of the left side of the parcel receiving box 240 in its undeployed orientation. The top lid 256 again is illustrated in its undeployed orientation.

Fig. 36 illustrates the top lid 256 fully extended and ready to be lowered into position to lock the swing out parcel receiving box 240. A locking groove 291 formed around the perimeter of the top lid 256 locks the panels 272 L, 252, 272 R in their deployed orientations, thereby reducing the likelihood of unauthorized access. A lock mechanism 247 of any of a number of known types
25 drives a bolt through a locking slot 249 provided in panel 252.

Fig. 37 illustrates a perspective view from the front, left side and above, of the closed, fully deployed, swing out parcel receiving box 240. To retrieve the delivered parcel(s), an authorized individual uses a key to release the bolt
30 associated with the lock 247, permitting the individual to rotate the top lid 256 upward toward the wall 246 and then permit it to drop down between the wall 246 and

the wall mount structure 244. The removable pin 275 may be removed from the right side of the wall mount structure and the three panels 272 L, 252, 272 R and two link members 290, 292 rotated to facilitate removal of the parcel(s). Once the parcel(s) has (have) been removed, the panels 272 L, 252, 272 R and link members 290, 292 are rotated back towards the wall 246 and the removable pin 275 is replaced. The double hinged cover plate 254 is lowered to cover the internal components. While no secondary parcel gate 68 is illustrated in this embodiment, one clearly could be provided in the same manner as in the embodiment illustrated in Figs. 1-24.

Fig 38 illustrates the double hinged cover plate 242 in the open position.

Fig. 39 illustrates the wall mount structure 244. Snap on cover panels are used to cover over the bolt hole access. One of the guide slots 282 for the top lid 256 pivot pins 294 is also illustrated. Figs. 40-41 illustrate the wall mount structure 244.

Fig. 42 illustrates the underside of the top lid 256. The guide slots 282 and pivot pins 294 that slide up and down in guide slots 282, and pivot in guide slots 282 to permit closing and opening of the lid 256 are illustrated.

Fig. 43 illustrates the front panel 252.

Fig. 44 illustrates the small link 290 that links the left side panel 272 L and the front panel 252.

Fig. 45 illustrates the large link 292 that links the front panel 252 and the right side panel 272 R.

Fig. 46 illustrates the left side panel 272 L. Fig. 47 illustrates the right side panel 272 R.

0661320-101800

What is claimed is:

1. An enclosure including a pair of panel mounts for orienting adjacent a surface, a pair of side panels movably coupled to the panel mounts and
5 movable between storage orientations generally between the panel mounts and use orientations in which they project away from the surface generally perpendicular thereto, a top panel having a storage orientation generally between the panel mounts and a use orientation in which it is projected from between the panel mounts and pivoted downwardly and forwardly to overlie and engage the side panels and a front
10 panel for engagement with the side panels and the top panel when the top panel is in its use orientation to form an enclosure.
2. The apparatus of claim 1 wherein the side panels are pivotally coupled to the panel mounts by hinges.
3. The apparatus of claim 2 and further including links for
15 coupling the side panels and the front panel together and to the panel mounts, each side panel being pivotally coupled to a panel mount and projecting forwardly therefrom in a use orientation and being pivotally coupled to a respective link, and each link being pivotally coupled to the front panel.
4. The apparatus of claim 1 wherein the top panel has a use
20 orientation in which it is projected upward from between the panel mounts and pivoted downwardly and forwardly to overlie and engage the side panels.
5. The apparatus of claim 1 wherein the front and top panels include a front panel, a first top component, and a second top component.
6. The apparatus of claim 1 further including a mechanism by
25 which the parcel receiving box can be locked when the panels are so oriented as to form an enclosure.
7. The apparatus of claim 1 further including a bottom panel having a storage orientation in which it lies generally between the panel mounts and a use orientation in which it is pivoted forwardly and downwardly with respect to the
30 panel mounts to lie at the bottom of the enclosure.

06691323-101800

8. The apparatus of claim 7 further including a device for limiting the forward and downward pivoting of the bottom panel with respect to the panel mount.

9. A method for providing an enclosure including providing a pair of panel mounts for orienting adjacent a surface, movably coupling a pair of side panels to the panel mounts for movement between storage orientations generally between the panel mounts and use orientations in which they project away from the surface generally perpendicular thereto, mounting a top panel for movement between a storage orientation generally between the panel mounts and a use orientation overlying and engaging the side panels, and providing a front panel for engaging the side panels and the top panel when the top panel is in its use orientation to form an enclosure.

10. The method of claim 9 wherein pivotally coupling the side panels to the panel mounts includes hingedly coupling the side panels to the panel mounts.

11. The method of claim 10 and further including coupling the side panels and the front panel together through links, each side panel being pivotally coupled to a panel mount and projecting forwardly therefrom in a use orientation and being pivotally coupled to a respective link, and each link being pivotally coupled to the front panel.

12. The method of claim 9 including projecting the top panel upward from between the panel mounts and pivoting the top panel downwardly and forwardly to overlie and engage the side panels.

13. The method of claim 9 wherein providing front and top panels includes providing a front panel, a first top component, and a second top component.

14. The method of claim 9 further including providing a mechanism by which the parcel receiving box can be locked when the panels are so oriented as to form an enclosure.

15. The method of claim 9 further including providing a bottom panel having a storage orientation in which it lies generally between the panel mounts and a use orientation in which it is pivoted forwardly and downwardly with respect to the panel mounts to lie at the bottom of the enclosure.

16. The method of claim 15 further including limiting the forward and downward pivoting of the bottom panel with respect to the panel mount.

09601328-101800

Abstract of the Disclosure

An enclosure includes a pair of panel mounts for orienting adjacent a surface, a pair of side panels movably coupled to the panel mounts and movable
5 between storage orientations generally between the panel mounts and use orientations in which they project away from the surface generally perpendicular thereto, a top panel having a storage orientation generally between the panel mounts and a use orientation in which it is projected from between the panel mounts and pivoted downwardly and forwardly to overlie and engage the side panels and a front panel for
10 engagement with the side panels and the top panel when the top panel is in its use orientation to form an enclosure.

09/01/2013 10:00:00



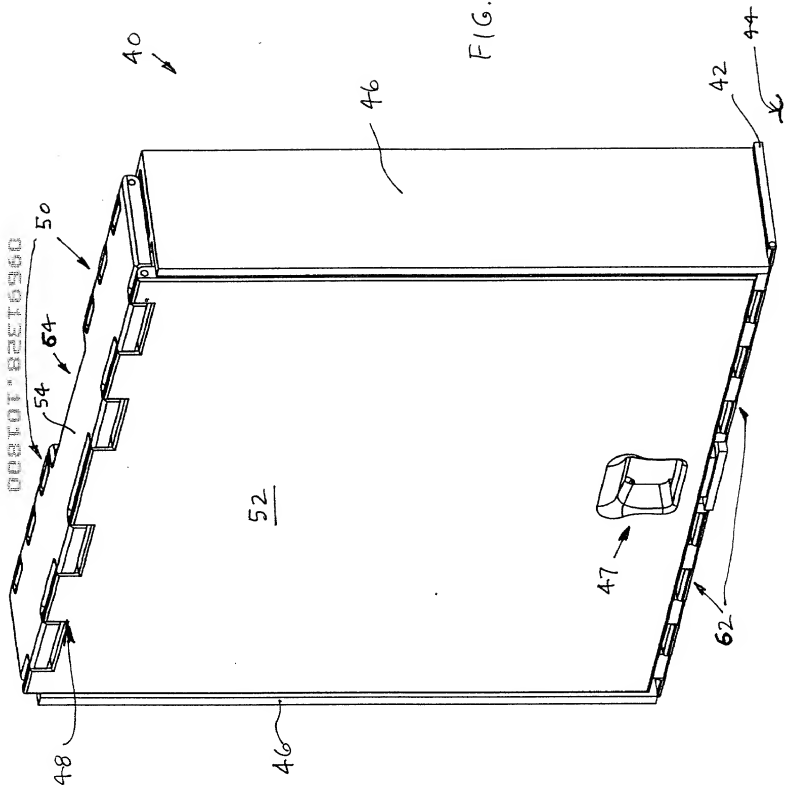


FIG. 1

004101-92E16960


FIG. 2

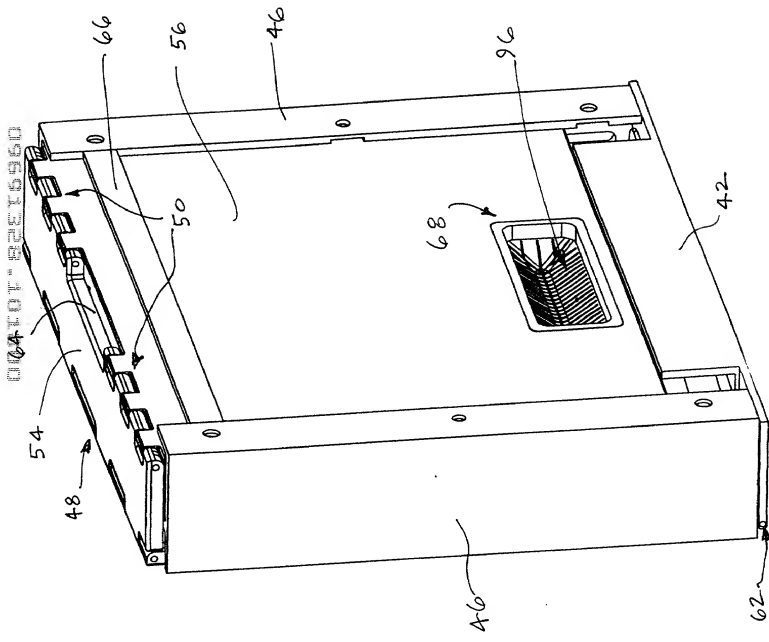

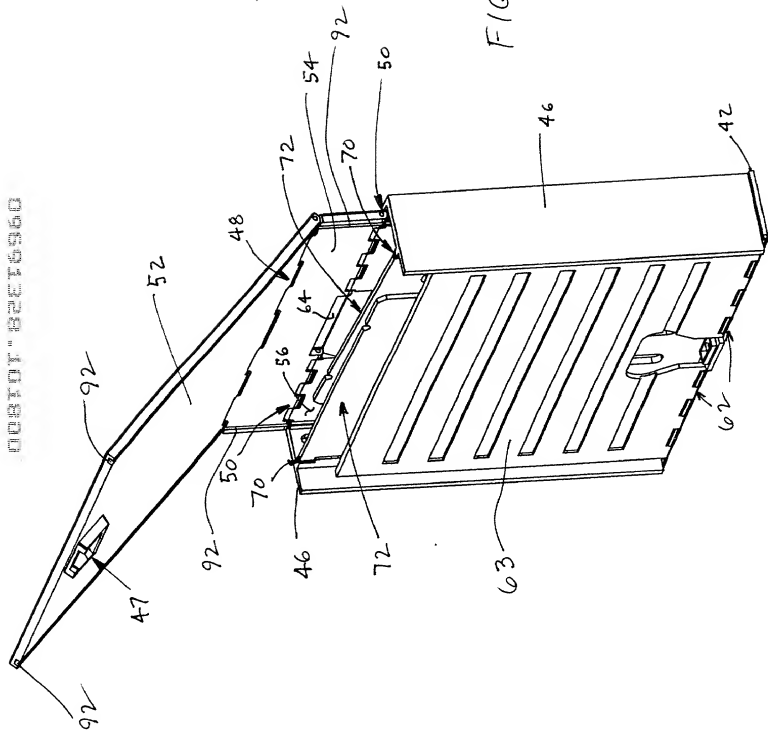

008101-82E16960

FIG. 4

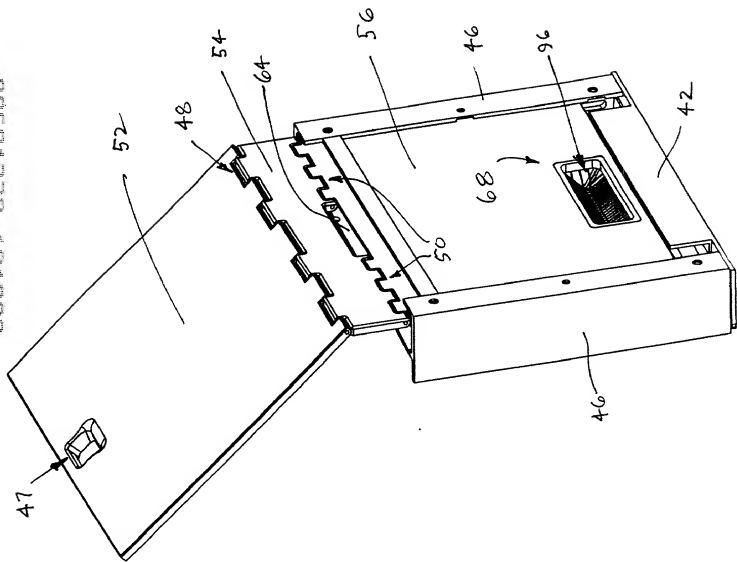


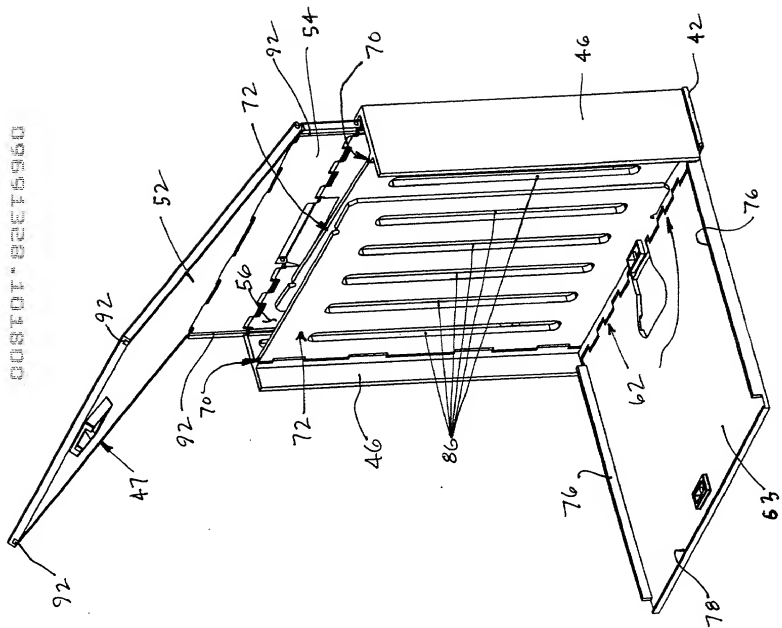


FIG. 5

FIG. 6

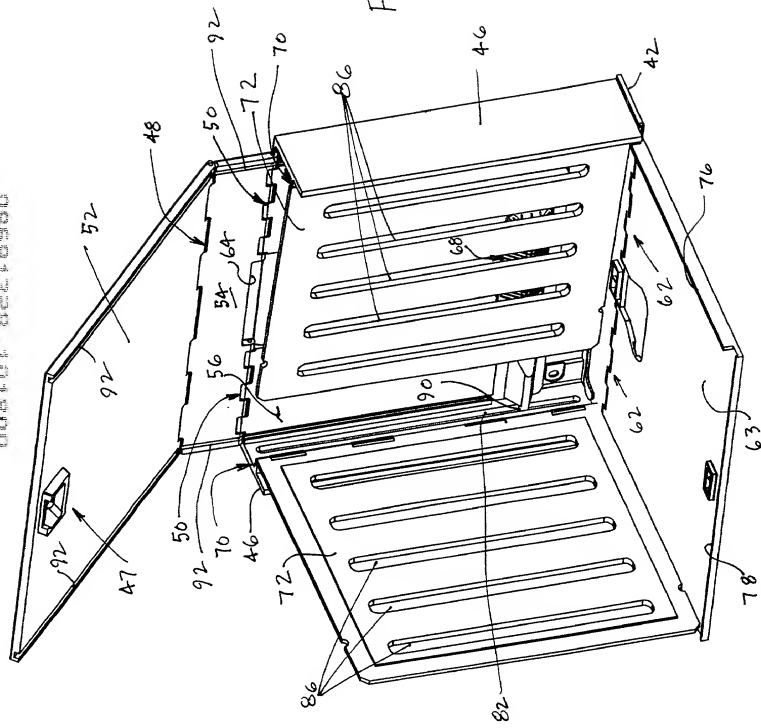

0081001-02210280

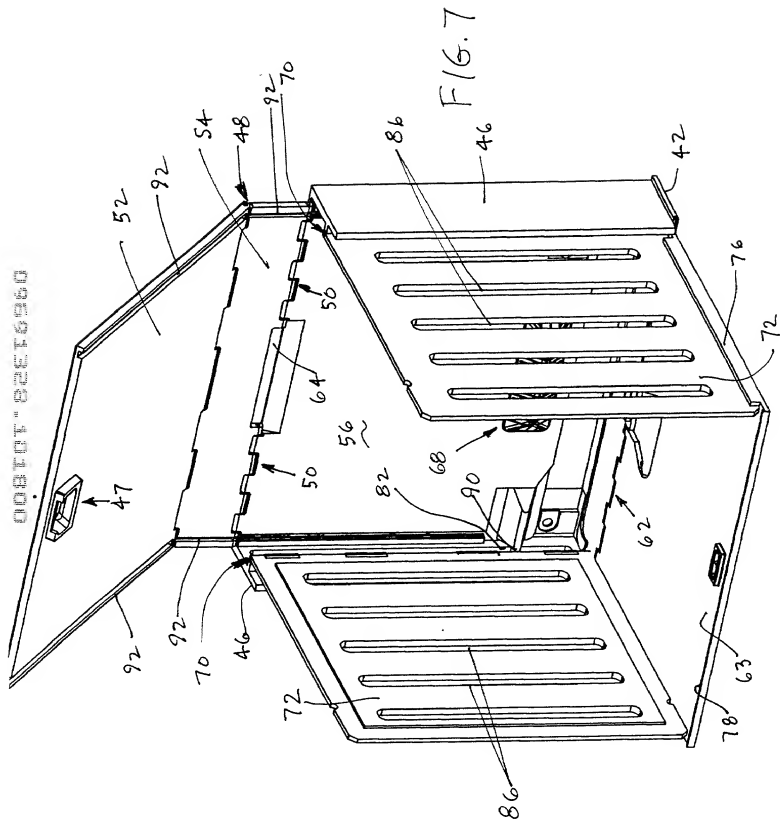
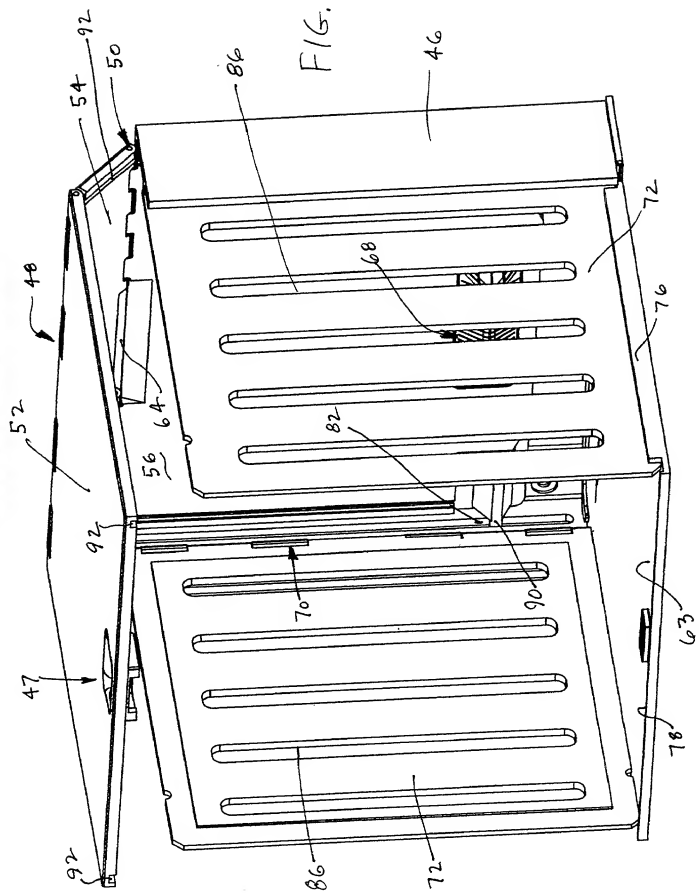


FIG. 8




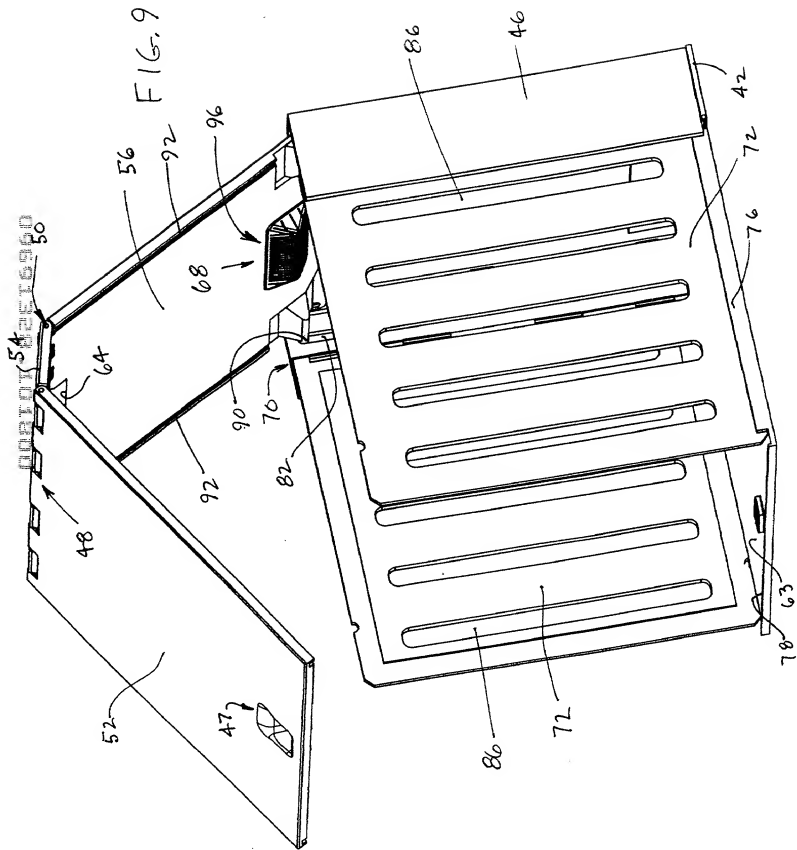


FIG. 10

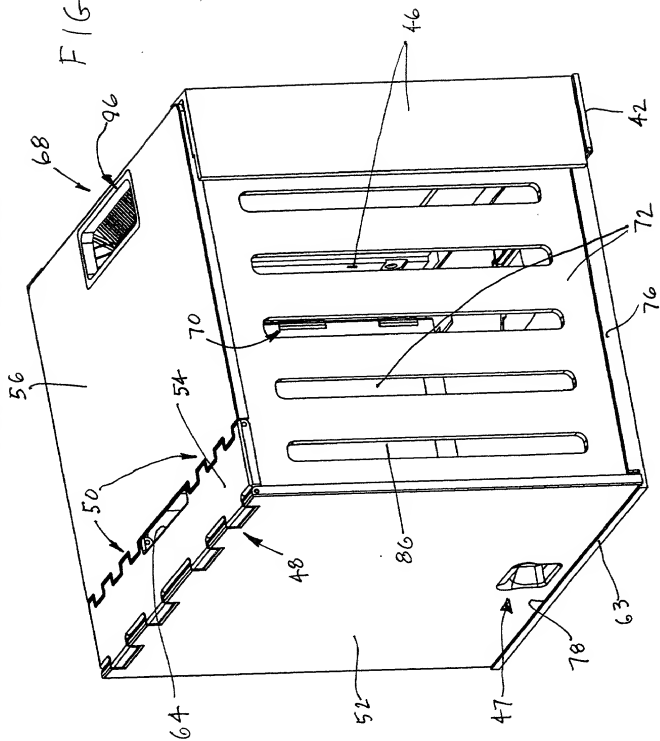

008101-82316960

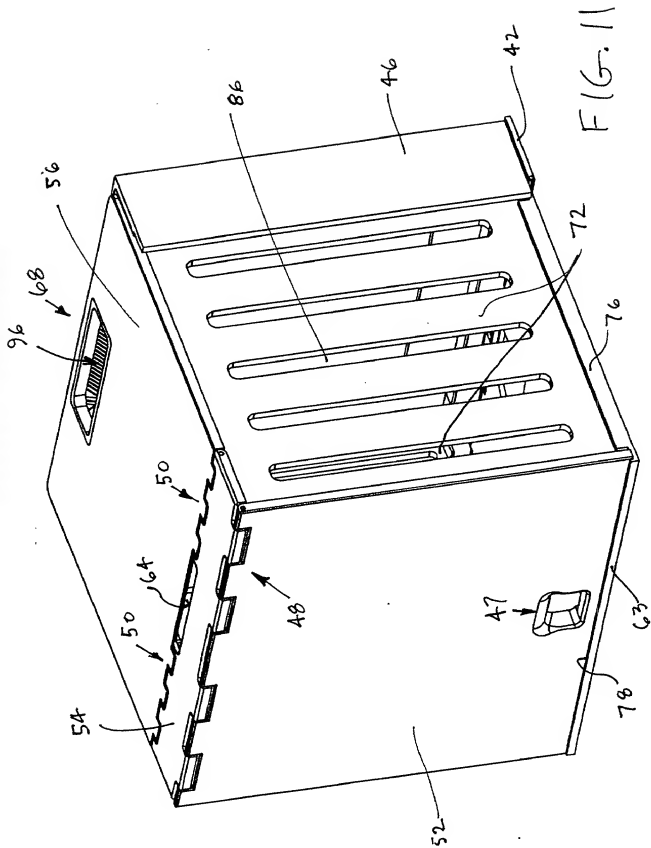
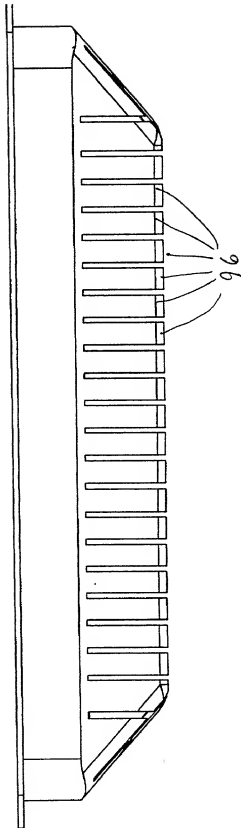


FIG. 11

FIG. 12

68



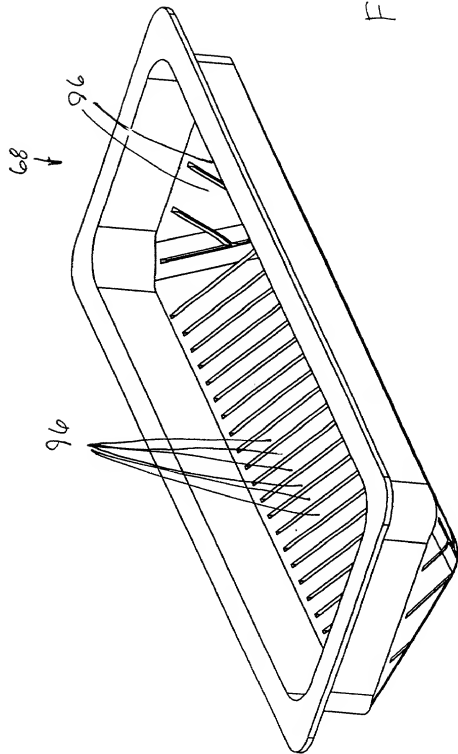
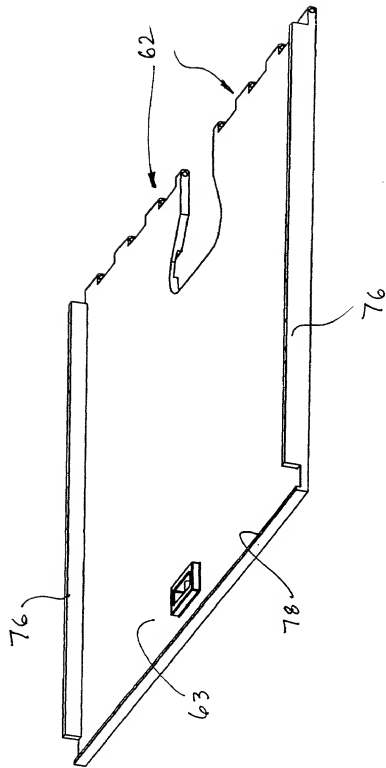


FIG. 13

FIG. 14



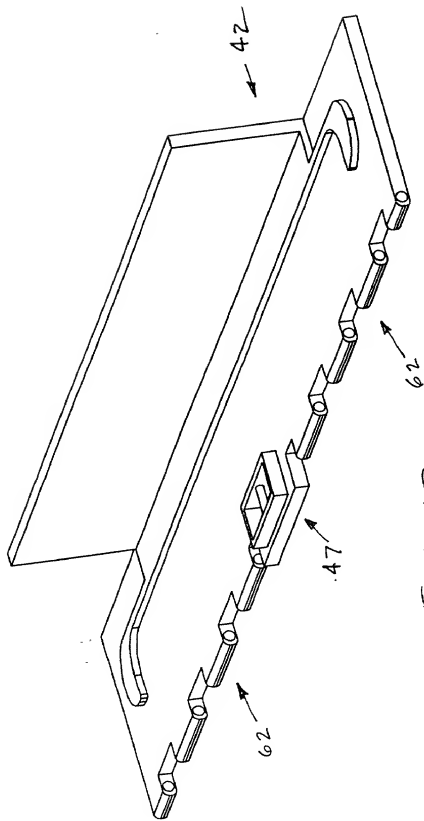


FIG. 15


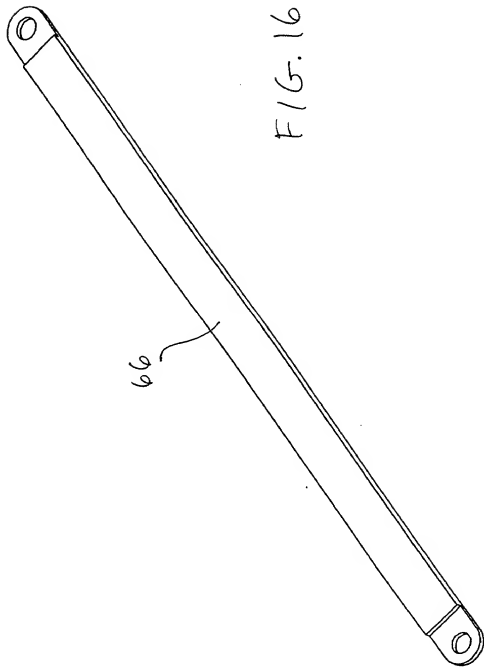


FIG. 16

FIG. 17

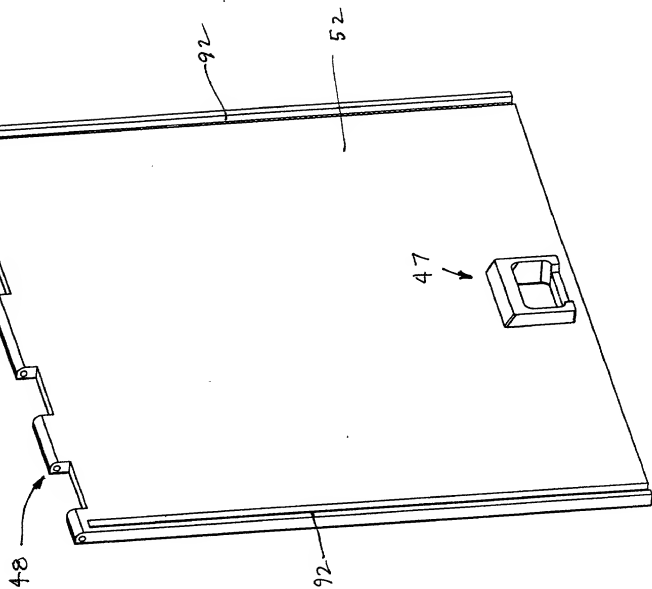


000001-02210000

72

70

FIG. 18

86

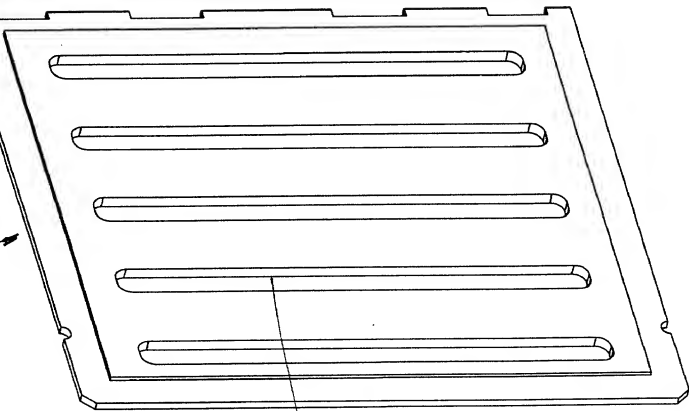

008701-82516960

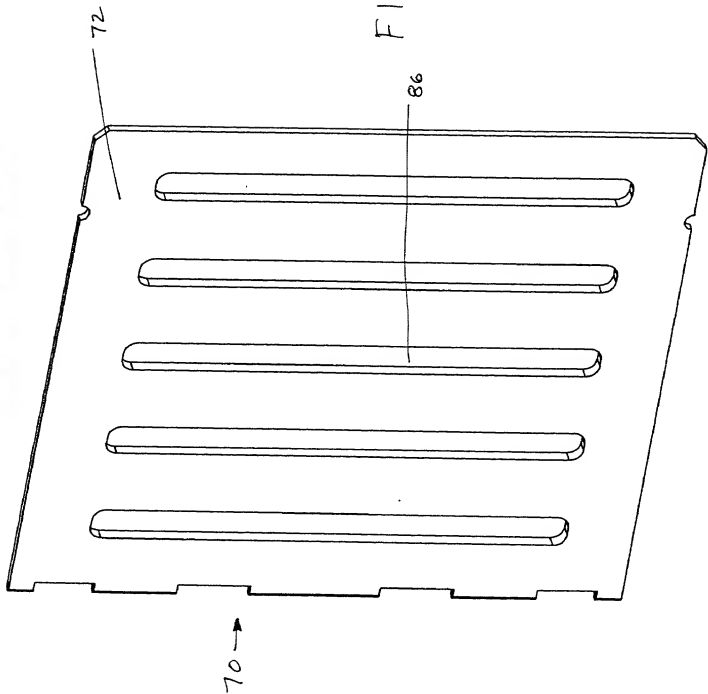


FIG. 19

008101.02210960


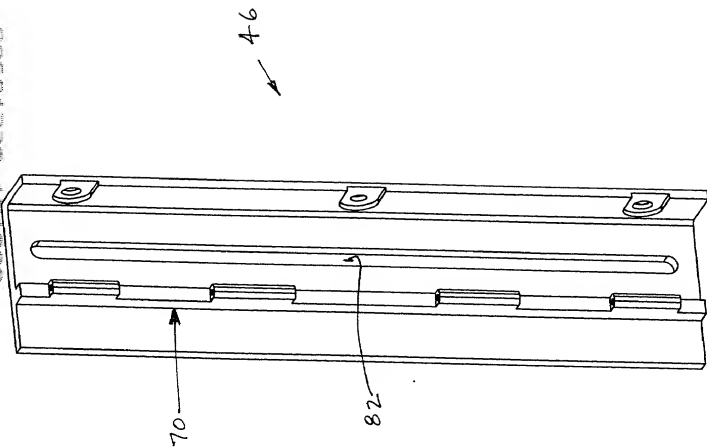


FIG. 20

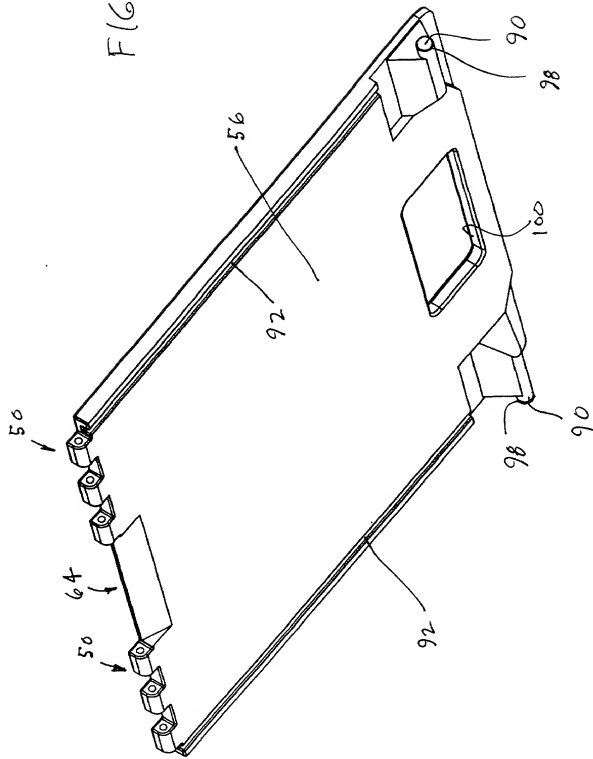

F(6.21

FIG. 22

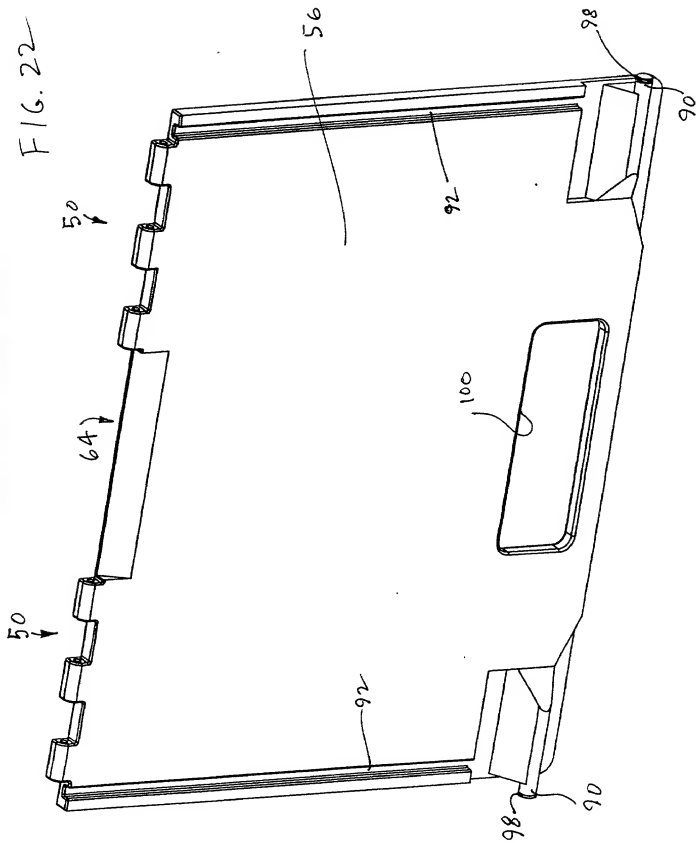


FIG. 23






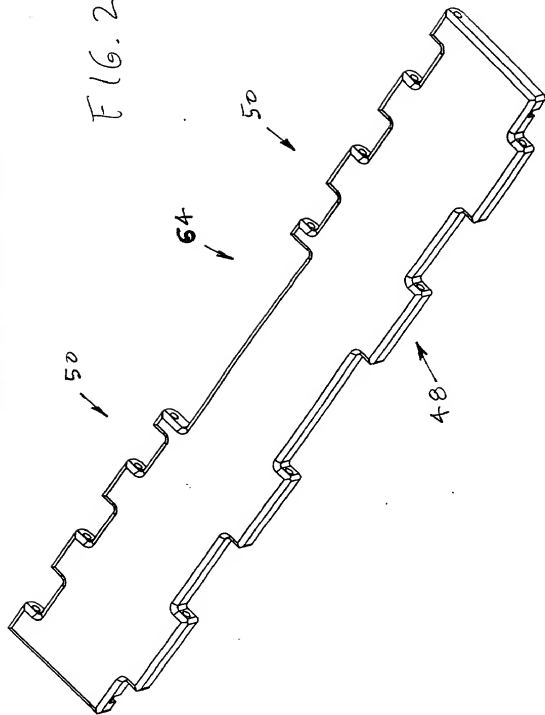



FIG. 24

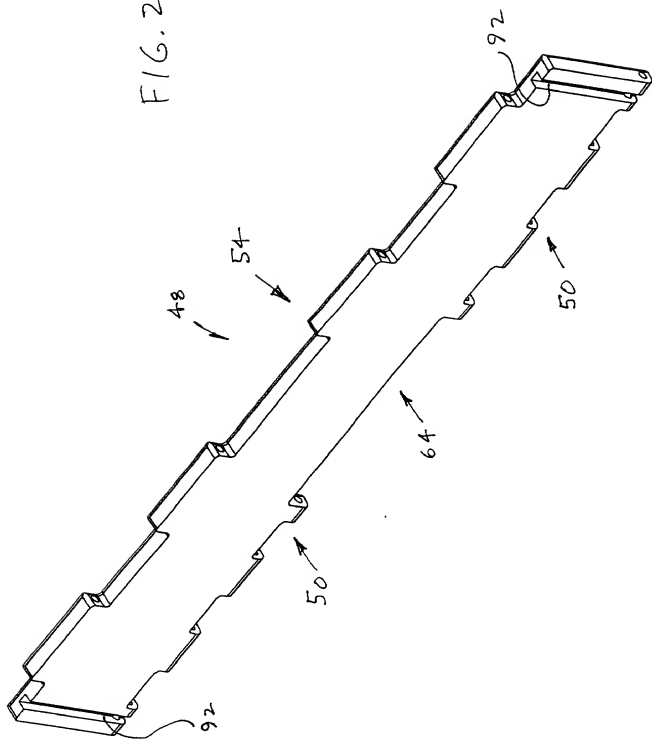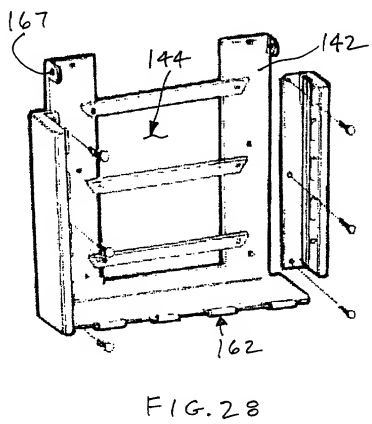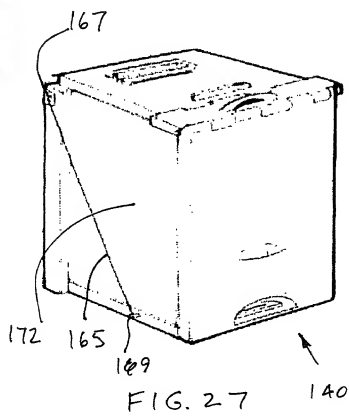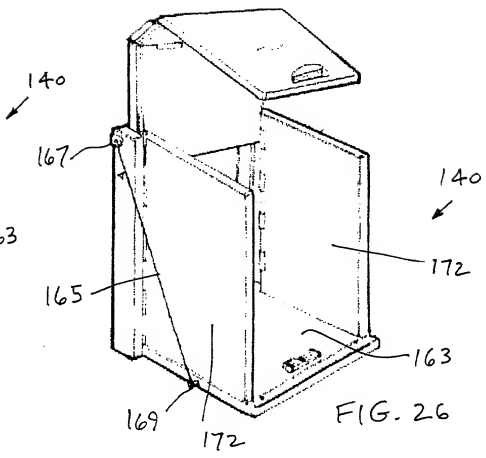

09691328.101800

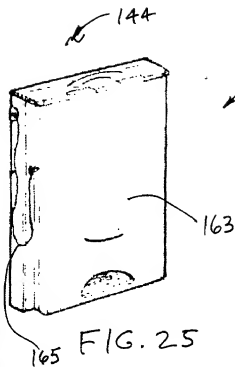

008101-82516960

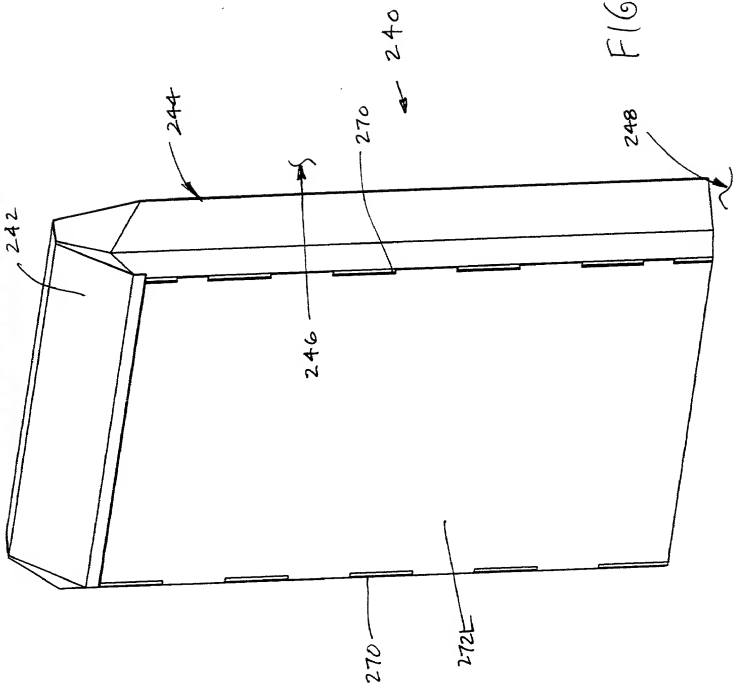

F16.29

008701-82516960
242

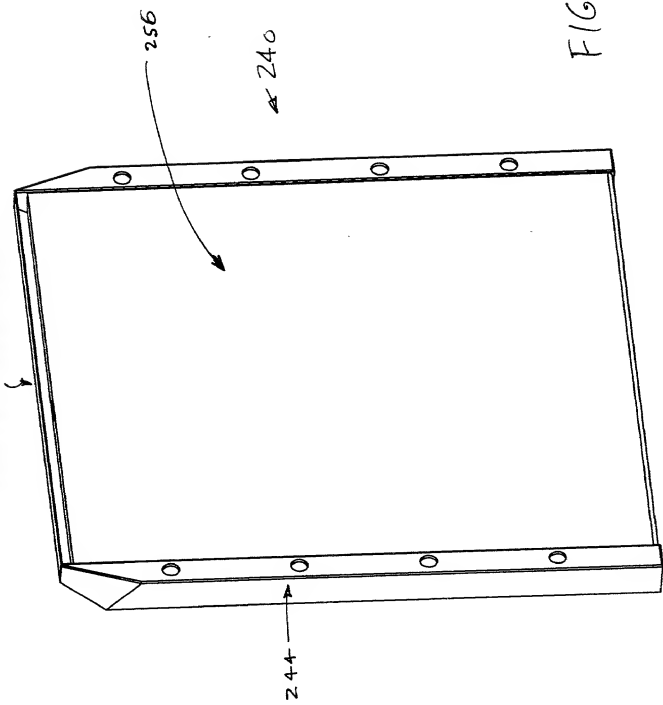
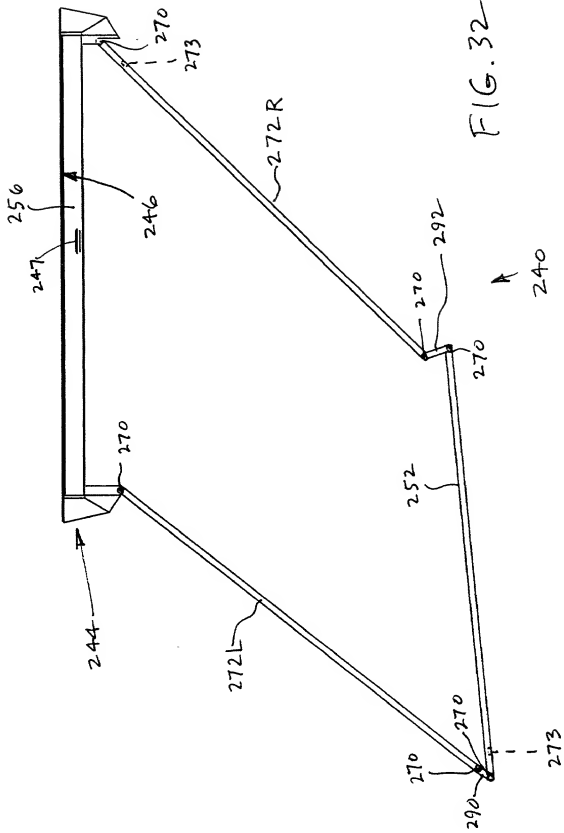


FIG. 30



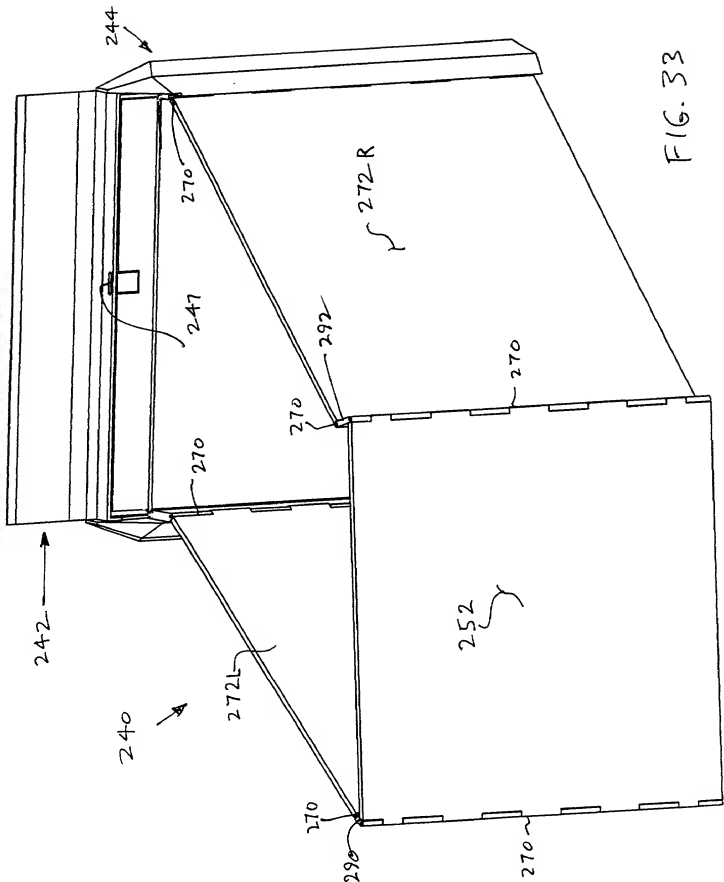


FIG. 33


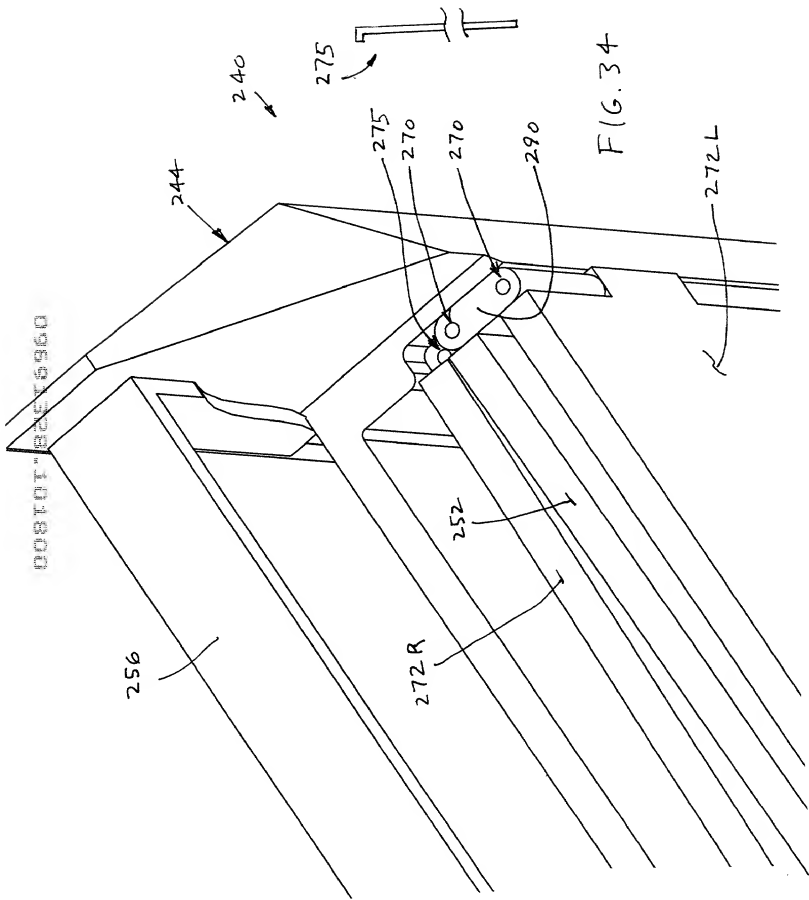



FIG. 34

FIG. 35

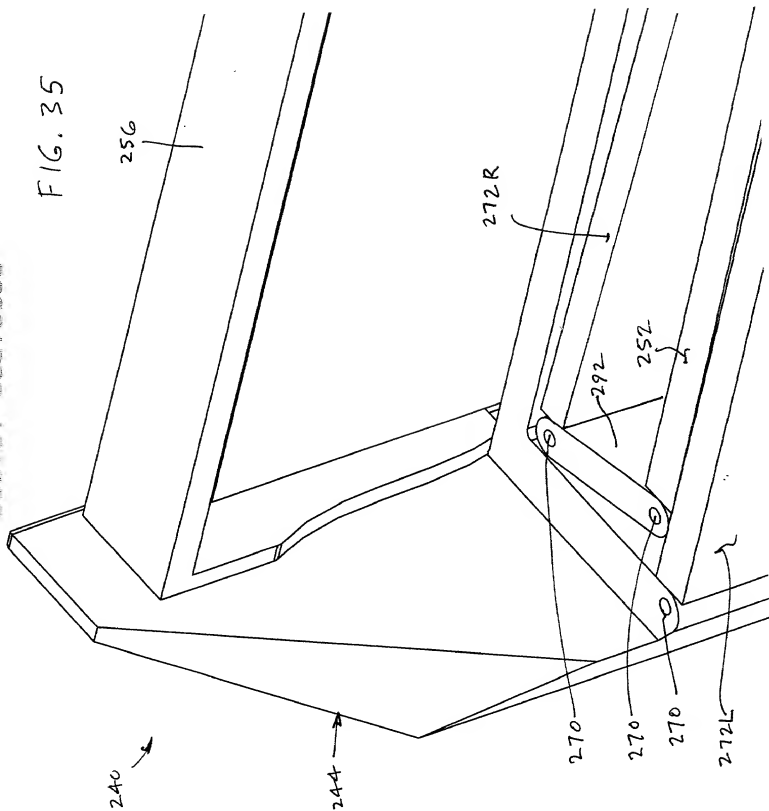

008101-82516960

FIG. 36

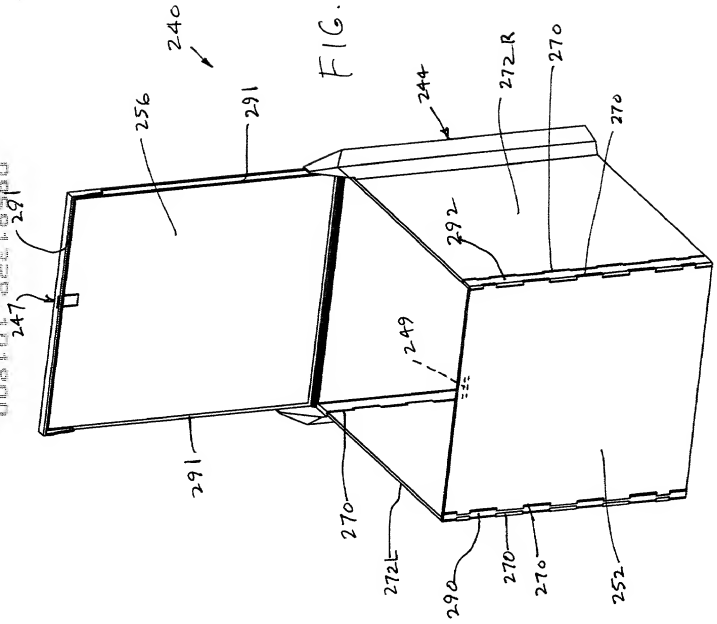

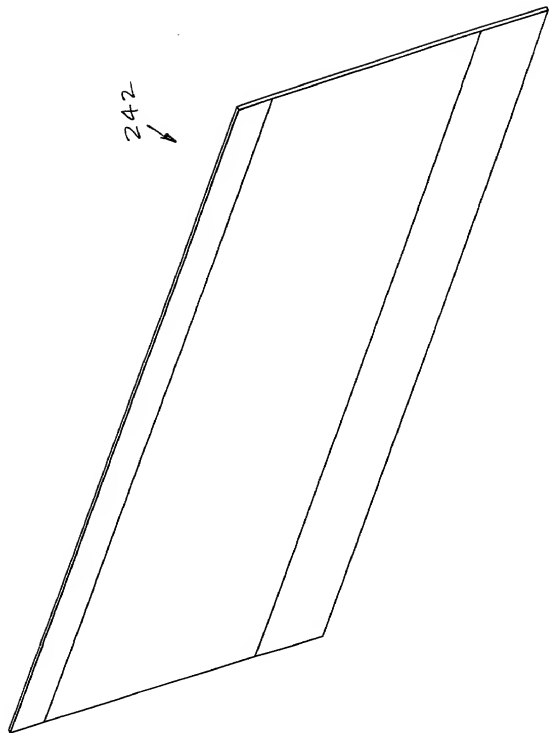


FIG. 38

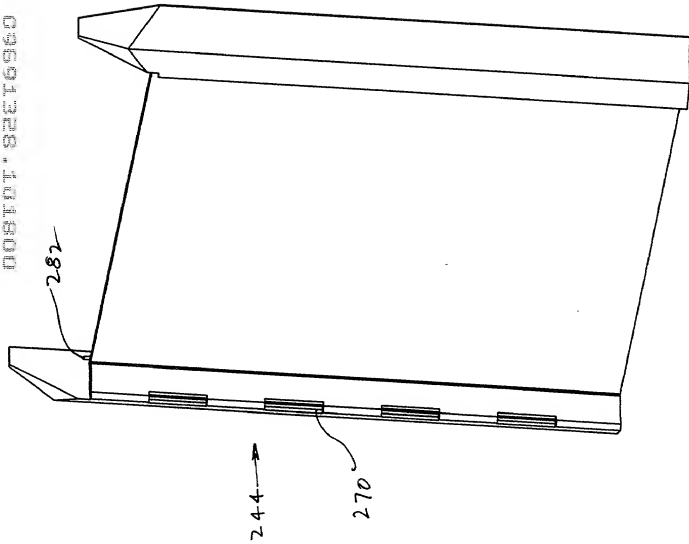


FIG. 39

009101* 32216960

244 →

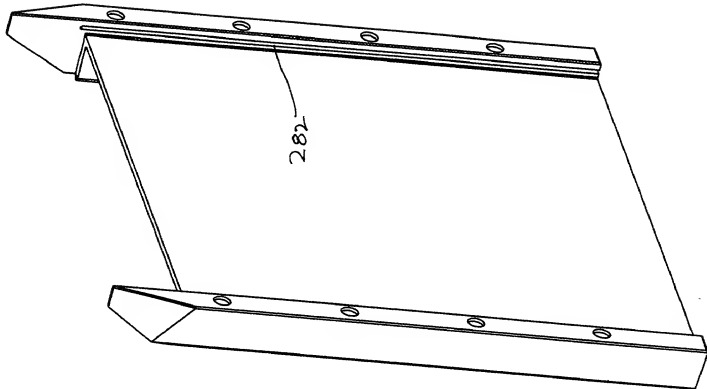


FIG. 40

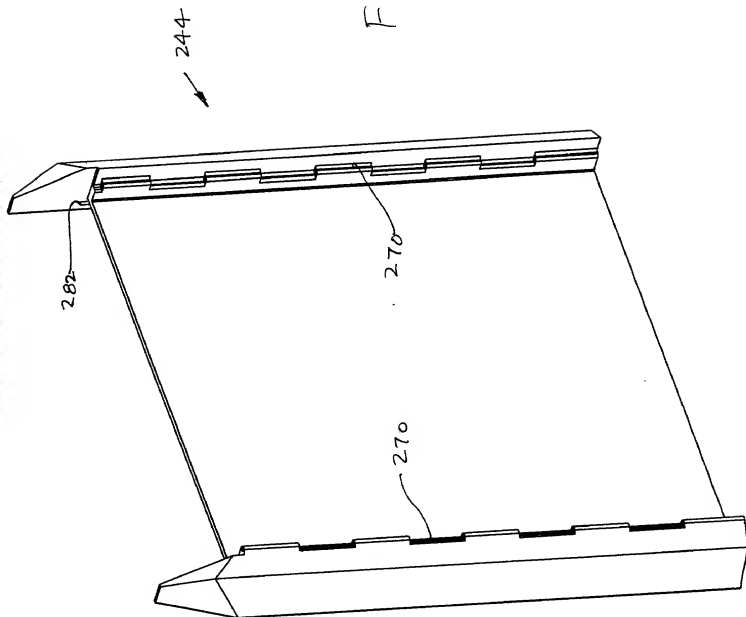


FIG. 41

FIG. 42

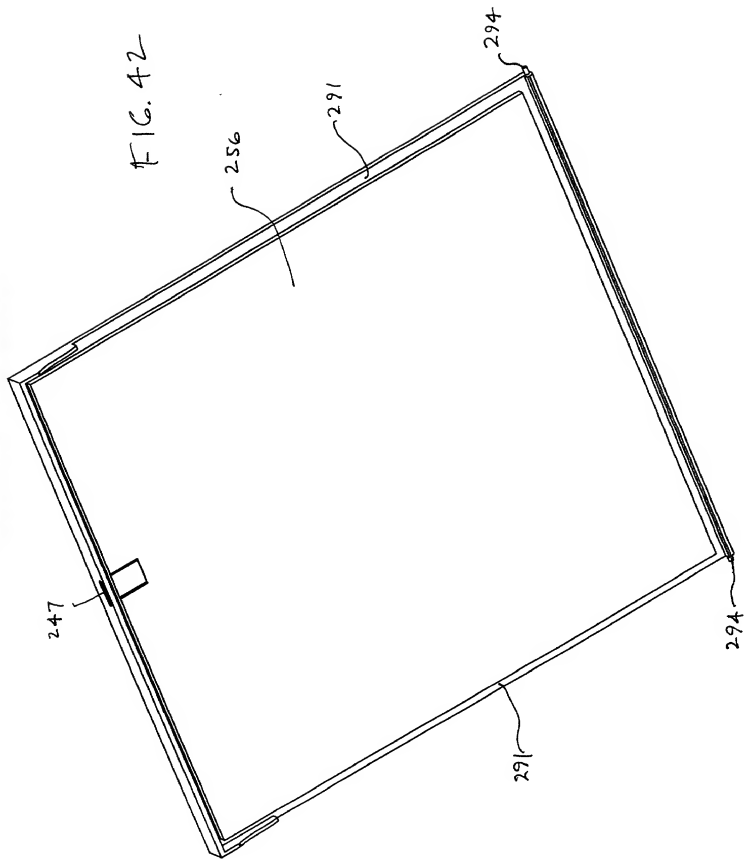


FIG. 43

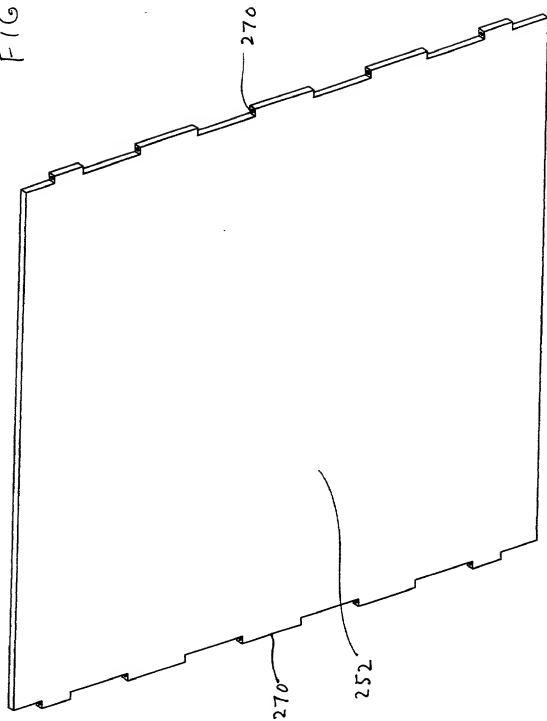


FIG. 44


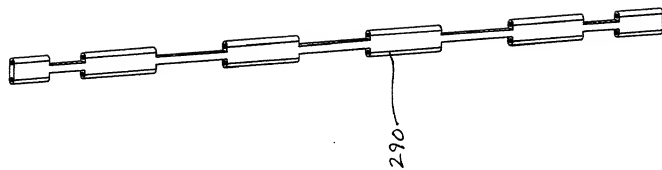


FIG. 45

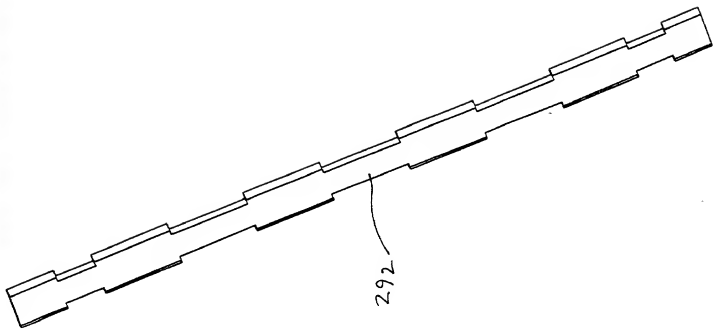

09691328-101800

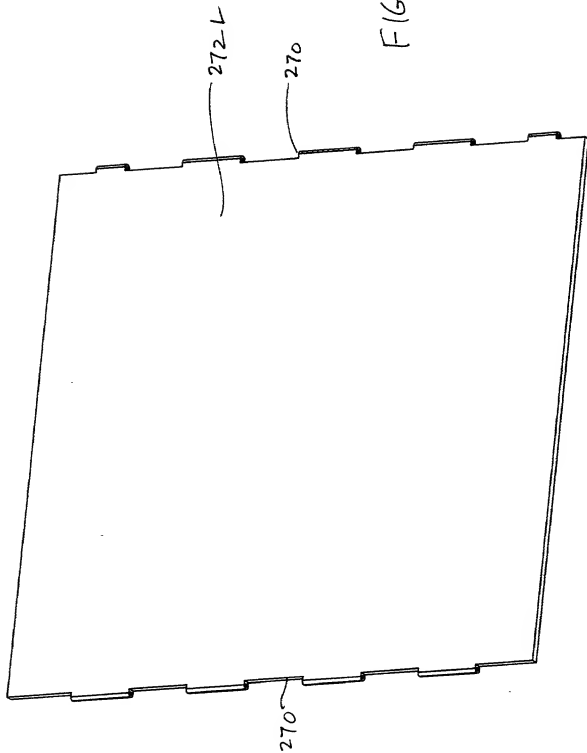


FIG. 46

0901223-101800

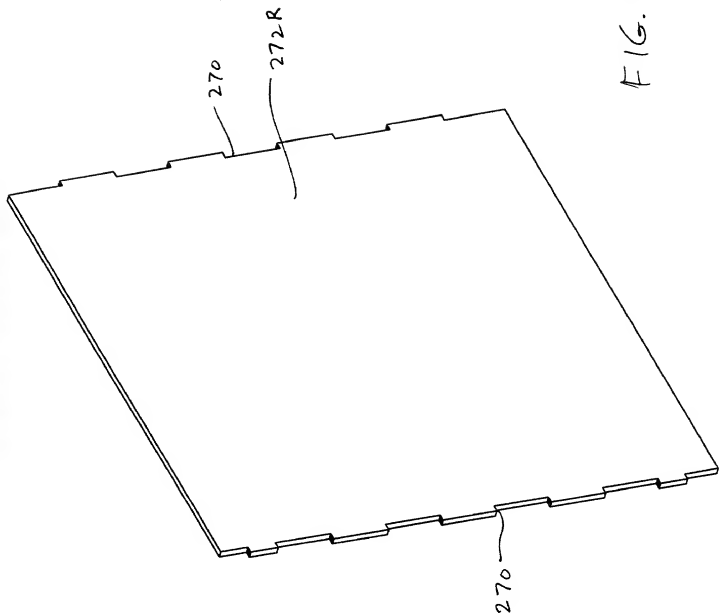


FIG. 47

Docket No.

22784-65403

Declaration and Power of Attorney For Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PARCEL BOX

the specification of which

(check one)

☒ is attached hereto.

☐ was filed on _____ as United States Application No. or PCT International

Application Number _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

<u>60/160,223</u>	<u>10/18/99</u>
(Application Serial No.)	(Filing Date)
<u>60/196,025</u>	<u>4/7/2000</u>
(Application Serial No.)	(Filing Date)
_____	_____
(Application Serial No.)	(Filing Date)

I hereby claim the benefit under 35 U. S. C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C. F. R., Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)
_____	_____	_____
(Application Serial No.)	(Filing Date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(list name and registration number)*

William R. Coffey, Reg. No. 24023; Arland T. Stein, Reg. No. 25062; Nancy J. Harrison, Reg. No. 27083; Richard D. Conard, Reg. No. 27321; Dilip A. Kulkarni, Reg. No. 27510; Steven R. Lammert, Reg. No. 27653; Richard A. Rezek, Reg. No. 30796; David B. Quick, Reg. No. 31993; Paul B. Hunt, Reg. No. 37154; Sue Corbett Watson, Reg. No. 38850; Jill T. Powlick, Reg. No. 42088; William B. Richards, Reg. No. 44301; Jay S. Paranjpe, Reg. No. 45486; James R. Sweeney II, Reg. No. 45670; Dustin S. DuBois, Reg. No. 46233; Christopher E. Haigh, Reg. No. 46377; Rebecca Ball, Reg. No. 46535; Perry Palan, Reg. No. 26213; Mark M. Newman, Reg. No. 31472; David E. Herron, Reg. No. 46467; Bobby B. Gillenwater, Reg. No. 31105; Gregory S. Cooper, Reg. No. 40965; Scott M. Lohnes, Reg. No. 45451; Thomas J. Donovan, Reg. No. 33231; Alice O. Martin, Reg. No. 35601; Grant H. Peters, Reg. No. 35977; Mark A. Hamill, Reg. No. 37145; Michael B. Allen, Reg. No. 37582; and Mark D. Maloney, Reg. No. 43771


Send Correspondence to: **Barnes & Thornburg**
11 S. Meridian Street
Indianapolis, Indiana 46204

Direct Telephone Calls to: *(name and telephone number)*
Richard D. Conard (317) 231-7285

Full name of sole or first inventor Joseph A. Rasche	
Sole or first inventor's signature <i>Joseph A. Rasche</i>	Date 10-17-2000
Residence 2124 North Hannah Court Lebanon, Indiana 46052	
Citizenship US	
Post Office Address	

Full name of second inventor, if any	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division



Application deficiencies were found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

Last page of the transmittal is misnumbered.

☐ Scanned copy is best available.